

XL SLIDE AXLE



XL 70 Slide Axle (Slider)

YOUR SOLUTIONS-BASED HAULING PARTNER



XL 70 SA

SUPERIOR HYDRAULICS

The XL Slider features an **extended dump angle of 17 degrees** and improved hydraulics to keep your equipment from unnecessary wear. Hydraulic sliding axle assembly with traveling bumper provides under ride protection.



XL 110 SA

UNMATCHED EFFICIENCY

A **6½ degree load angle** permits you to easily load pavers and rollers, while the **winch** at the front loads inoperable equipment. A single 2 stage cylinder provides **maximum travel and minimal maintenance**.



XL 70 SSA

SUPER SLIDER OPTION

Using the innovative technology custom engineered by XL for this product, the Super Slider takes hydraulics to a new standard with the **elimination of a center cylinder**, keeping repair costs down.


BUILT WITH YOU IN MIND

- 17 degree dump angle
- Drop leg landing gear
- 12,000 lb winch with 100' of 7/16" cable, 20,000 and 30,000 lb winch option available for even larger equipment
- 21" king pin setting
- 2 recessed cable rollers
- 10' 5" full-width upper deck
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a **full 1 year warranty**.
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a **5 year structural warranty**.

FIND YOUR SPECIALIZED SOLUTION TODAY

visit xlspecializedtrailer.com

XL SLIDE AXLE

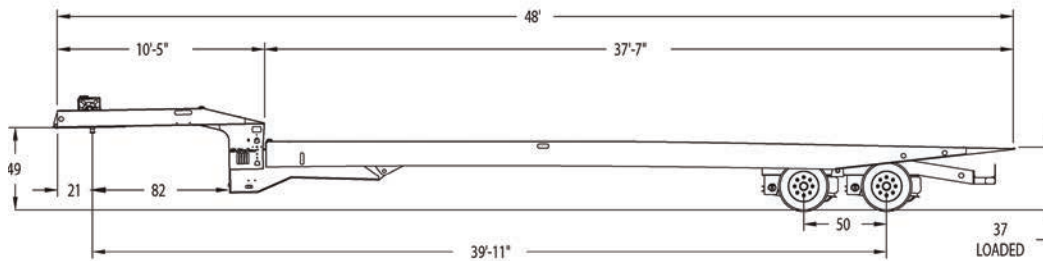

XL 70 SA

CAPACITY: 70,000 LB OVERALL
CONCENTRATED: 50,000 LB IN 10'
OAL: 48' | OAW: 102"

SPECS

GOOSENECK

10' 5" LONG
12,000 LB HYDRAULIC WINCH
WITH MANUAL KICK OUT, ROLLER GUIDE
AND 100' OF CABLE
CABLE ROLLER BACK OF NECK
DROP LEG JACK
(2) TOOL BOXES IN UPPER DECK
CHAIN DROPS ON 48" CENTERS
1 $\frac{3}{8}$ " APITONG DECKING RAISED
82" SWING CLEARANCE
21" KING PIN SETTING
HYDRAULICS RUN OFF OF WET KIT
PIVOTING 5TH WHEEL PLATE

SUSPENSION

25,000 LB AIR RIDE
MANUAL DUMP VALVE

WHEELS AND TIRES

6.75 X 17.5 STEEL RIMS
245 / 70R / 17.5 TIRES

MAIN DECK

37' 7" LONG
T-1 FLANGE, 80K WEB
CABLE ROLLER ON FRONT DECK
37" LOADED DECK HEIGHT
CHAIN DROPS ON 24" CENTERS
1 $\frac{3}{8}$ " APITONG DECKING RAISED
17° DUMP ANGLE ON 48' TRAILER
15° DUMP ANGLE ON 53' TRAILER
4" JR. I-BEAM CROSS MEMBERS AND
3" TUBE ON 16" CENTERS
FAB I-BEAMS
6 $\frac{1}{2}$ ° LOAD ANGLE

AXLES

(2) 25,000 LB NOMINAL
50" SPACING
HUB PILOT, OUTBOARD DRUMS
251M ABS
SPRING BRAKES ON ONE AXLE
12 $\frac{1}{4}$ X 7 $\frac{1}{2}$ " BRAKES
LIMIT CHAINS ON AXLES

LIGHTING

D.O.T. APPROVED 12V SEALED
GROTE HARNESS
RUBBER MOUNTED LED LIGHTS
(1) MID-TURN SIGNAL PER SIDE
(2) CLEARANCE LIGHT PER SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LIGHT PACKAGE WITH
ALUMINUM COVER

NEW INDUSTRY-LEADING PAINT PROCESS

1 YEAR WARRANTY
BLACK, IH RED, OR NEW CAT YELLOW
AIR & ELECTRIC DONE AFTER PAINT

AVAILABLE MODELS

XL 70 SA
XL 110 SA
ALSO AVAILABLE AS SUPER
SLIDERS, XL SSA

OPTIONS



Hydraulic winch



XL Super Slider

POPULAR OPTIONS

XL Super Slide Axle version
15, 20 or 30,000 lb
hydraulic winch
24 HP self contained
power unit
2 Speed landing gear

60" Axle spacing
Auxiliary air outlet at rear
Hydraulic deck levers
Wireless remote
Fork lift package
Many more available