

XL TOWERMATE II



XL 140 TowerMate II

YOUR SOLUTIONS-BASED HAULING PARTNER



PATENTED XL CHEATER NECK

Hydraulic sliding king pin can be hooked and unhooked without continually getting in and out of truck. The air lock automatically secures gooseneck to trailer. Neck features **7 different ride-height positions** for easy height and ground clearance adjustment.



TELESCOPIC SCHNABEL

The height of the Schnabel is controlled by **hydraulic cylinders**, so decreasing height for the return trip is easily achieved. Schnabel is locked in place using the air chamber, resulting in secure travel.



TOWER MOUNTING PLATE

Tower mounting **plate holes are precision machined** to fit perfectly no matter what brand or size. Damage to the paint on the tower section is greatly reduced. Multiple adjustment plates accommodate different towers. A lifting point is used to allow for easy movement.


BUILT WITH YOU IN MIND

- Beam centers are tapered to fit the design of the tower section.
- 3 rear self-steering axles generate a tighter turning radius of 25 degrees.
- Ridewell suspension is standard.
- Return trip can be made on 3 axles to save tire wear and improve handling.
- Few escorts needed for return trip
- Low maintenance costs
- Fewer toll road charges/permit costs
- Unit is ideal for meeting DOT regulations
- Diamond plate aluminum fenders provide full tire coverage, protecting tower from rock and debris.
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a **full 1 year warranty**.
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a **5 year structural warranty**.

FIND YOUR SPECIALIZED SOLUTION TODAY

visit xlspecializedtrailer.com

XL TOWERMATE II

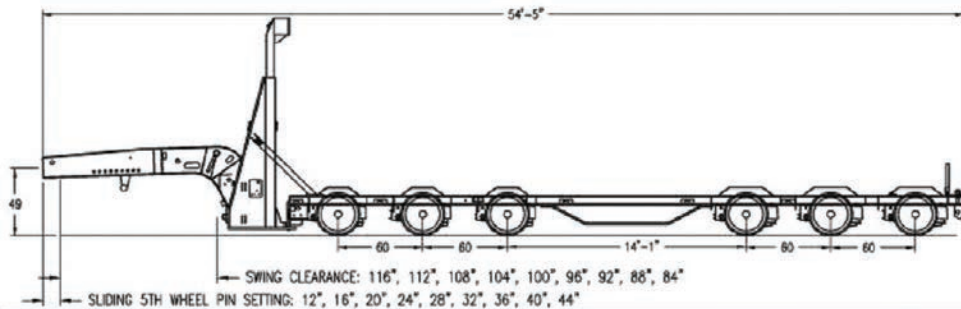

XL TMII

CAPACITY: 140,000 LB
OAL: 54' 5" | OAW: 132¾"

SPECS

GOOSENECK

HYDRAULIC DETACHABLE NARROW NECK
APPROXIMATELY 35" TRAVEL
14'5" CHEATER GOOSENECK
7 POSITION FIFTH WHEEL HEIGHT
12" - 44" KING PIN SETTING
WET KIT TO RUN HYDRAULICS
SAFETY LATCH
32" TELESCOPIC SCHNABEL

REAR BRIDGE

40' LONG
21" LOADED HEIGHT
(5) LOAD CRADLES
(5) STRAPPING POINTS
(4) D-RINGS PER SIDE
DIAMOND PLATE ALUMINUM FENDERS
MUDFLAPS
(2) FLAG HOLDERS
OVERSIZE LOAD SIGN

SUSPENSION & AXLES

25,000 LB AIR RIDE
SHUT OFF VALVES ON EACH AIRBAG
RAISE AND LOWER VALVE ALL AXLES
MANUAL RIDE HEIGHT CONTROL

FRONT

(3) 25,000 LB NOMINAL
STRAIGHT- DROP AXLES IN FRONT
CHAIN-UP WITH DUMP VALVE

REAR

(3) 25,000 LB NOMINAL
RIDE HEIGHT VALVE

FRONT/REAR

60"-60"-14'-1"-60"-60"
HUB PILOT, OUTBOARD DRUMS
12¼" X 7½" BRAKES
AIR SUPPLY FOR TOOLS ON EACH SIDE
SPRING BRAKES ON 3 AXLES

WHEELS AND TIRES

6.75 X 17.5 STEEL RIMS
245 / 17.5 TIRES

LIGHTING

D.O.T. APPROVED 12V SEALED
GROTE HARNESS
RUBBER MOUNTED LED LIGHTS
(1) MID-TURN SIGNAL PER SIDE
(2) CLEARANCE LIGHT PER SIDE
7 POLE ELECTRICAL SOCKET
3 TAIL LIGHT PACKAGE WITH
ALUMINUM COVER
(2) BEACON LIGHTS

NEW INDUSTRY-LEADING PAINT PROCESS

1 YEAR WARRANTY
BLACK, IH RED, OR NEW CAT YELLOW
AIR & ELECTRIC DONE AFTER PAINT

OPTIONS



3 HYDRAULIC OPTIONS

Wet kit
13 HP unit
Dual kit: wet kit and 13hp S.C.U.



POPULAR OPTIONS

Chain brackets with larger holes
Spare tire carrier
Aluminum fenders and rims
Aluminum toolbox
Many more available